



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Saint Louis Designs, Inc. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF Saint Louis Designs, Inc. IS PROHIBITED.

| REVISIONS | | DATE |
|-----------|--------------------------------------|------------|
| IR | INITIAL RELEASE | 2/18/2003 |
| A | REDUCED QTY MS20426AD3-8 FROM 3 TO 2 | 12/16/2004 |
| B | ADDED SHIM (PN: 1010) TO ASSEMBLY | 6/20/2005 |

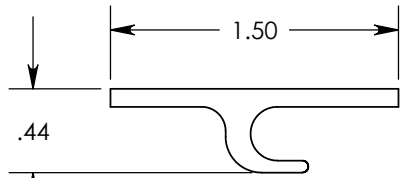

**OPTIONAL
CATCH
PN: 1012**


Ø .14 THRU
✓ Ø .28 X 100°

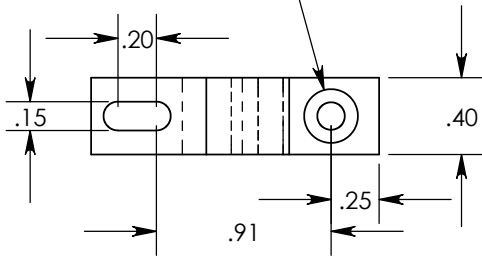


INSTALLATION:

1. ALLOW .156" (5/32") TRAVEL FOR LOCKING AND UNLOCKING.
2. PLACE SHIM PROVIDED BETWEEN LATCH AND MOUNT SURFACE TO PREVENT RIVETS FROM RUBBING MOUNT SURFACE.


#6-32 UNC
2X

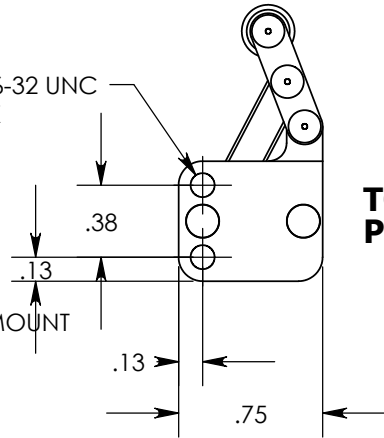




**TOUCH LATCH
PN: TL1000-T**

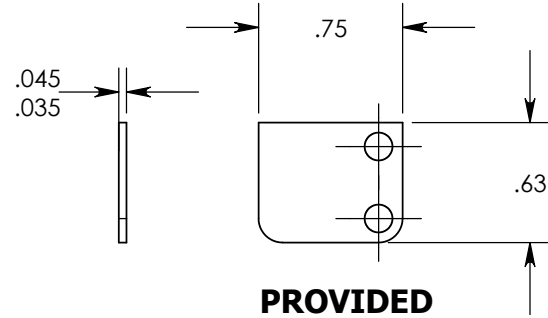

**PROVIDED
SHIM
PN: 1010**



INSTALL USING SHIM (PN: 1010) UNDER LATCH TO PREVENT RIVET HEADS FROM BINDING, EITHER SIDE.



UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

XX = ±.010
XXX = ±.005
ANGULAR = ±1°
SURFACE = 32 RMA OR BETTER

CAD GENERATED DRAWING.
DO NOT MANUALLY UPDATE.

APPROVAL

DATE

MATERIAL
VARIOUS METALS

DRAWN

MSTL

6/20/05

CHECKED

FINISH
N/A

Saint Louis Designs, Inc.

P.O. BOX 3400, AUSTIN, TX 78764

(800) 431-6684, st-louis@texas.net

TOUCH LATCH
BLIND INSTALLATION
SHOWN W/ SHIM &
OPTIONAL CATCH

SIZE
A

PART #

TL1000-T

DO NOT SCALE DRAWING

SCALE:

CAD FILE:

SHEET 1 OF 1