
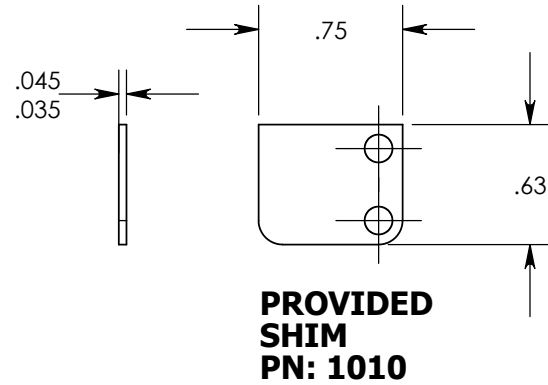





THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Saint Louis Designs, Inc. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF Saint Louis Designs, Inc. IS PROHIBITED.

REVISIONS		DATE
IR	INITIAL RELEASE	2/18/2003
A	REDUCED QTY MS20426AD3-8 FROM 3 TO 2	12/16/2004
B	ADDED SHIM (PN: 1010) TO ASSEMBLY	6/20/2005

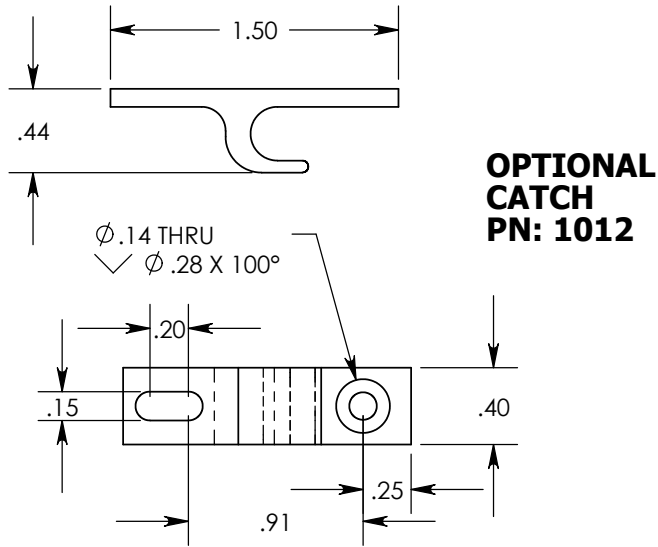

**INSTALLATION:**

1. ALLOW .156" (5/32") TRAVEL FOR LOCKING AND UNLOCKING.
2. PLACE SHIM PROVIDED BETWEEN LATCH AND MOUNT SURFACE TO PREVENT RIVETS FROM RUBBING MOUNT SURFACE.

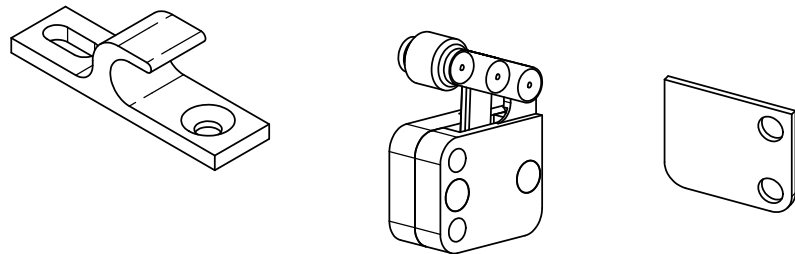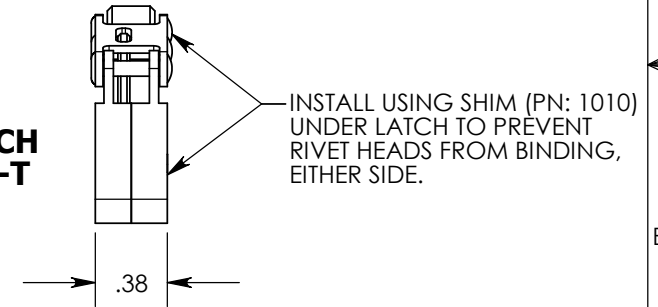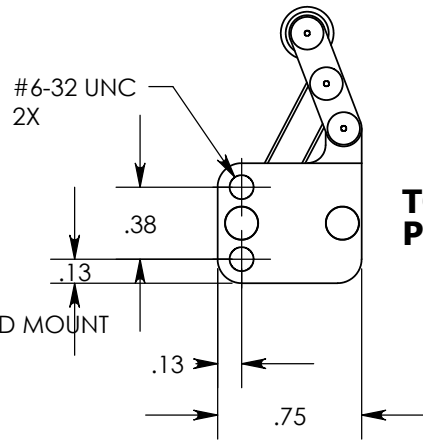

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:

XX =  $\pm .010$   
XXX =  $\pm .005$   
ANGULAR =  $\pm 1^\circ$   
SURFACE = 32 RMA OR BETTER

CAD GENERATED DRAWING.  
DO NOT MANUALLY UPDATE.

APPROVAL	DATE
DRAWN MSTL	6/20/05
CHECKED	
DO NOT SCALE DRAWING	

MATERIAL  
VARIOUS METALS

FINISH  
N/A

**Saint Louis Designs, Inc.**

P.O. BOX 3400, AUSTIN, TX 78764

(800) 431-6684, st-louis@texas.net

TOUCH LATCH  
BLIND INSTALLATION  
SHOWN W/ SHIM &  
OPTIONAL CATCH

SIZE PART #  
A TL1000-T